

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
10 June 2004 (10.06.2004)

PCT

(10) International Publication Number  
**WO 2004/049694 A1**

(51) International Patent Classification<sup>7</sup>: **H04N 1/40**,  
G03F 5/00

(72) Inventor; and

(75) Inventor/Applicant (for US only): **BARTELS, Rudolf**  
[BE/BE]; c/o AGFA-Gevaert, Corporate IP Department  
3800, Septestraat 27, B-2640 Mortsel (BE).

(21) International Application Number:  
PCT/EP2003/050893

(22) International Filing Date:  
25 November 2003 (25.11.2003)

(81) Designated States (national): CN, JP, US.

(25) Filing Language: English

(84) Designated States (regional): European patent (AT, BE,  
BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU,  
IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).

(26) Publication Language: English

(30) Priority Data:

02102636.4	25 November 2002 (25.11.2002)	EP
60/428,838	25 November 2002 (25.11.2002)	US
03100220.7	4 February 2003 (04.02.2003)	EP
60/451,415	4 March 2003 (04.03.2003)	US


Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(71) Applicant (for all designated States except US):  
**AGFA-GEVAERT** [BE/BE]; Septestraat 27, B-2640  
Mortsel (BE).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD FOR GENERATING NON-PRINTING DOTS IN A SCREENED REPRESENTATION OF AN IMAGE

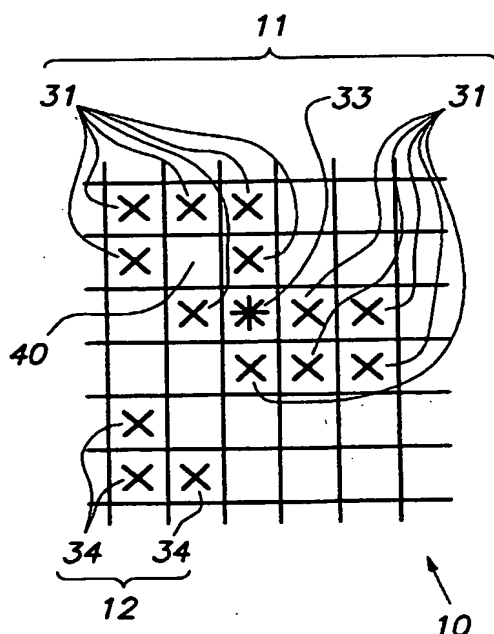

(57) Abstract: A method for generating a bitmap (10) from an original image for printing a reproduction of the original image, the method including (a) generating a set (11, 12) of contiguous microdots (31-34) of the bitmap (10); and (b) generating a non-printing dot (40) in the set (11, 12) of contiguous microdots (31-34), depending on a specific characteristic selected from a characteristic of the original image and a characteristic of the set of contiguous microdots.

- 1 -

METHOD FOR GENERATING NON-PRINTING DOTS IN A SCREENED REPRESENTATION  
OF AN IMAGE

5 [DESCRIPTION]

FIELD OF THE INVENTION

The invention relates to generating a bitmap from an original  
10 image for printing a reproduction of said original image.

BACKGROUND OF THE INVENTION

15 Patent application **FR-A-2 660 445** discloses a method for making  
films or printing plates wherein a portion of the inkphilic surfaces  
of the obtained printing plates contain small, non-inkphilic  
surfaces. One of the objects of this method is to effect a better  
release of the paper from the printing rolls, in an offset press.

20 However, the method as described in **FR-A-2 660 445** has  
drawbacks, as stated in patent **US-A-6 406 833**. To cope with these  
drawbacks, **US-A-6 406 833**, which is included herein by reference,  
discloses to locate the small, non-inkphilic surfaces in accordance  
with a frequency-modulated screen.

25

SUMMARY OF THE INVENTION

The present invention is a method for generating a bitmap from  
30 an original image for printing a reproduction of the original image,  
as claimed in independent claims 1 and 12. Preferred embodiments of  
the invention are set out in the dependent claims. Preferably, a  
method in accordance with the invention is implemented by a computer  
program as claimed in claim 16.

35 The meaning of some terms used in the claims is now amplified  
or explained.

- 2 -

Many reproduction devices are not capable of reproducing a continuous range of tones. For example, offset printing or inkjet printing methods can either deposit ink or not. In order to reproduce an original image, the image is therefore transformed to a set of binary single color images, each referred to as a "bitmap", or an "electronically generated image". Each bitmap comprises "microdots", that preferably form a two-dimensional array, and that are the smallest addressable units in a bitmap. These microdots may either be turned on or not, thus determining, e.g. on an offset press, at what locations ink will be deposited to reproduce the original image. A "set of contiguous microdots" denotes in this document a number of contiguous microdots that correspond to an area where ink will be deposited to reproduce the original image.

A bitmap may contain screened data, non-screened data, or both. Screening, which is also called halftoning, breaks the original image down into a series of dots, called "image dots" in this document. Screening allows to simulate continuous tones on reproduction devices that are not capable of reproducing a continuous range of tones. Two major classes of screening methods are AM screening (Amplitude Modulated screening) and FM screening (Frequency Modulated screening). A bitmap may also contain non-screened data. E.g. full color areas, also called "solid areas" in this document, and text, are usually not screened; they are represented in a bitmap by a set of contiguous microdots that form an unbroken block that is not split up into image dots. Screened data, on the other hand, contains sets of contiguous microdots that form image dots.

A "printing plate precursor" is an imaging material that can be used as a printing plate after one or more treatment steps, that include image-wise exposure and possibly processing. A "direct-to-plate" exposure is an exposure wherein the printing plate is directly exposed, without the intermediate step of writing the image to film. Direct-to-plate exposure is also called computer to plate (CtP): the electronically generated image is written directly to the plate, e.g. in an apparatus called a platesetter. In computer to film (CtF), the electronically generated image is written to film,

- 3 -

e.g. in an imagesetter, and subsequently the image on film is copied to the plate. Both in a platesetter and in an imagesetter, the printing plate precursor is thus exposed in accordance with a bitmap of the original image.

5 A "non-printing dot" means, in this document, a dot that corresponds to an area that does not accept ink on the printing plate with which the image will be printed. A non-printing dot thus corresponds to a non-inkphilic surface in **FR-A-2 660 445**, mentioned above. A non-printing dot comprises one or more microdots. That a  
10 non-printing dot is "in" a set of contiguous microdots means that either the non-printing dot is totally surrounded by microdots of the set, or that the microdots of the non-printing dot and the microdots of the set overlap, so that the area of the set of contiguous microdots becomes smaller after combination with the non-  
15 printing dot (which corresponds to the "lightening" of an image by means of non-printing dots, as discussed in **US-A-6 406 833** and **FR-A-2 660 445**, referred to already above). A non-printing dot may be in an image dot.

A method in accordance with the invention offers the advantage  
20 of better print quality, because the location and the size of the non-printing dots are well-controlled. Another advantage is saving ink during printing. Yet another advantage is a better release of the printing substrate, such as paper, from the printing rolls, e.g. in offset printing.

25 In a particular embodiment of the invention, direct-to-plate exposure is used. In this way, the exposure of the set of contiguous microdots of the bitmap and of the non-printing dots proceeds simultaneously, in a single step. There is thus no intermediate step of copying to film; in such an intermediate step,  
30 dot sizes may change and, if the set of contiguous microdots and the non-printing dots are not on the same film, their relative location on the plate may also be affected.

In one embodiment of the invention, at least one and preferably all the non-printing dots are generated conditionally, so that print  
35 quality is not adversely affected by their location, their size or both. Some possible conditions are discussed further below. In

- 4 -

this embodiment, CtP, CtF or any other exposure method as known in the art may be used. The condition that is used in generating a non-printing dot in a set of contiguous microdots may depend on a characteristic of the original image, on a characteristic of the set  
5 of contiguous microdots, or on both. Characteristics of the non-printing dots, such as their dot size, may also be taken into account. Some examples of such characteristics are: the set of contiguous microdots represents text (this is a characteristic of the original image); the border of the set of contiguous microdots  
10 (which is a characteristic of the set of contiguous microdots).

In a preferred embodiment of the invention, non-printing dots are generated conditionally and direct-to-plate exposure is used.

The non-printing dots may be generated when generating the screen tiles via the threshold matrices (see e.g. US-A-5 766 807 for  
15 more information on tiles, threshold matrices and other screening related terms). The non-printing dots may also be generated by controlling the raster image processor (RIP). These implementations are discussed in detail further below.

Further advantages and embodiments of the present invention  
20 will become apparent from the following description and drawings.

#### BRIEF DESCRIPTION OF THE DRAWINGS

25 The invention is described with reference to the following drawings without the intention to limit the invention thereto, and in which:

Fig. 1 shows a morphological filter;

Figs. 2 and 3 illustrate an embodiment in accordance with the  
30 invention.

#### DETAILED DESCRIPTION OF THE INVENTION

- 5 -

Some possible conditions that may be used in generating a non-printing dot are discussed now; these conditions may also be combined.

In a first embodiment, non-printing dots are generated in image dots in such a way that the resulting image dots (i.e. the image dots after their combination with the non-printing dots) are at least equal to a predetermined dot size. This predetermined dot size may be the size of the minimum printable dot for a given printing process, i.e. the smallest dot that can still be reproduced consistently (as discussed e.g. in US-A-5 766 807, cited already above).

In a second embodiment, non-printing dots are generated in such a way that fine details, e.g. hair lines, in the original image are preserved.

In a third embodiment, the number of non-printing dots in a set of contiguous microdots increases with increasing size of the set of contiguous microdots.

In a fourth embodiment, the outer circumference of the image dot is taken into account. The location of the non-printing dots is chosen so as to keep a small outer circumference of the resulting image dot (after combination with the non-printing dots). With  $c$  the outer circumference of the image dot before the combination with the non-printing dots, the outer circumference of the resulting image dot is preferably smaller than  $1.25*c$ , more preferably smaller than  $1.1*c$  and most preferably smaller than  $1.05*c$ . In this way, the resulting image dots are compact, which avoids that too much ink clings to them on the press.

In a fifth embodiment, text is preserved, i.e. no non-printing dots are generated in sets of contiguous microdots representing text.

In a sixth embodiment, non-printing dots are only generated in text having a text size larger than a predetermined text size.

In a seventh embodiment, the borders of selected sets of contiguous microdots are preserved, i.e. no non-printing dots are generated in the borders of these sets of contiguous microdots.

- 6 -

In an eighth embodiment, text borders are preserved, i.e. text borders are free of non-printing dots.

Non-printing dots may be generated in different ways, e.g. via the screen tiles or via the RIP.

5       When generating non-printing dots via the screen tiles, a minimum image dot size, e.g. equal to the size of a minimum printable dot, may be implemented as follows. A non-printing dot is represented in the threshold matrix by one or more adjoining microdots with, depending on the environment (e.g. PostScript is  
10       such an environment) either a very high threshold value ("infinity") or a very low threshold value (e.g. zero), so that these microdots will never be turned on. Further, the microdots that represent a non-printing dot are located in the threshold matrix "outside" of the zone that corresponds to the minimum dot size (this zone may be  
15       a square of 2\*2 microdots in the threshold matrix in case the minimum image dot size is four microdots).

Moreover, a transfer function may be used that maps 100 % black (or 100 % of another color) to a lower value, say 99.9 % black (or 99.9 % of another color). The reason for using such a transfer  
20       function is that in some environments no tile is used for 100 % black, so that no non-printing dots would be generated in that case. When using such a transfer function for full color areas, these areas will be screened, so that non-printing dots will be generated in these areas, via the screen tiles.

25       When generating non-printing dots via the RIP, a morphological filter may be applied to a set of contiguous microdots, or to the entire bitmap, in order to preserve fine details (such as hair lines). This is illustrated by the following example. In a square of 3\*3 = 9 microdots, at least seven microdots have to be turned on,  
30       i.e. will be printed black, before one of the microdots is replaced by a non-printing dot, i.e. a "white hole". A hair line, with three of the nine microdots turned on in the 3\*3 square, thus remains unchanged. If on the other hand eight of the nine microdots are turned on, a non-printing dot may be generated, depending on the  
35       value of a random number.

- 7 -

Fig. 1 shows another morphological filter 20, that is also defined by means of a square of 3\*3 microdots. The square contains a central location 22, four locations 21 forming a rectangular cross together with the central location 22, and four remaining locations  
5 23. This morphological filter 20 is applied to a bitmap, e.g. to the bitmap 10 shown in Fig. 2, as follows.

The bitmap 10 shown in Fig. 2 contains two sets 11, 12 of contiguous microdots. Set 12 contains the microdots 34, while set 11 contains the microdots 31, 32 and 33. In Fig. 2, and also in  
10 Fig. 3, the microdots 31-34 are represented symbolically by a "x" or a "\*". First, possible locations for non-printing dots are determined; this is discussed further below. In case microdot 32 is a candidate for being removed by generating a non-printing dot at its location, the morphological filter 20 is positioned as indicated  
15 by its border 25 and with its central location 22 corresponding to the candidate, microdot 32. The morphological filter 20 is now applied as a mask: if bitmap 10 contains turned on microdots 31 at all the locations 21 of the morphological filter 20 (which is the case in the illustrated example), then microdot 32, at the central  
20 location 22 of the morphological filter 20, will be removed, i.e. replaced by a non-printing dot 40. This is shown in Fig. 3, which represents the bitmap 10 after application of the morphological filter 20. The shape of the morphological filter 20 shown in Fig. 1 is so that microdots at the border of a set of contiguous microdots,  
25 such as microdots 34 in Fig. 2, will not be removed. This morphological filter 20 can thus be used to preserve the borders of sets of contiguous microdots. As is clear from Fig. 1 and Fig. 2, at the location of microdot 33 another non-printing dot may be generated without affecting the border of the set 11 of contiguous  
30 microdots.

In a preferred embodiment of the invention, possible locations for non-printing dots are determined and non-printing dots are generated conditionally, i.e. only at the locations where a predetermined condition is satisfied. The possible locations may be  
35 determined in accordance with an AM screen, preferably a fine AM screen with a high screen ruling of 120 lpi (lines per inch) or



- 8 -

more; alternatively, an FM screen or stochastic screen may be used to determine the possible locations for non-printing dots. For example a CristalRaster<sup>TM</sup> screen may be generated that corresponds with a density of 10 %. The locations of the generated FM dots are the locations where, subject to a predetermined condition, the non-printing dots will be generated.

In the example illustrated by Figs. 2 and 3, microdot 32 is determined as a possible location for a non-printing dot, but microdot 33 is not, so that only one non-printing dot 40 is generated, at the location of microdot 32, as shown by Fig. 3.

In the examples discussed above, the symbols "x" and "\*" in Figs. 2 and 3 represent a single microdot, and a non-printing dot has a size of only one microdot. In a preferred embodiment in accordance with the invention, the non-printing dots have a larger size. Preferred sizes are 2x2 microdots and 3x3 microdots. If a morphological filter is applied, it will then handle units of this larger size (such as 2x2 or 3x3) - in Fig. 1, each location 21, 22, 23 then has a size of e.g. 2x2 microdots. Larger morphological filters may also be used; an advantage is that much more sophisticated conditions may be applied.

Another example illustrating the invention is a black solid area that includes white text. When using the condition that text borders are to be preserved, (white) non-printing dots will be generated in the black solid area, and the text border will be free of non-printing dots.

The invention is not limited to the embodiments discussed above; e.g. a different morphological filter may be applied, that may have a size of 3\*3 units (wherein each unit contains e.g. 2x2 microdots), or it may have a size of 5\*5 units, or still another size.

It is preferred that the condition to generate non-printing dots is evaluated at the level of the frame buffer of the Raster Image Processor (RIP), i.e. where the bitmap, or at least a portion of it, is stored; this allows a high speed implementation of the invention. In a specific embodiment, a morphological filter is applied to the RIP's frame buffer.

- 9 -

The original image that is to be reproduced may be split into objects, such as text objects, solid area objects, contone image objects, etc. Generating non-printing dots may then be implemented by means of operators on these objects: an operator transforms an  
5 object into an object that includes non-printing dots. The operators may depend on the kind of objects they handle, so that e.g. borders of text objects are preserved.

In yet another implementation of the invention, the original image is partitioned into a number of portions, by means of a low  
10 pass filter: non-printing dots are only generated in the low frequency portions of the image, not in the high frequency portions.

The invention can be applied to positive printing plates and to negative printing plates. Normally, in a system with positive printing plates, microdots that are turned on in the bitmap  
15 correspond to locations on the printing plate that will not be exposed, that are inkphilic and that will carry ink during reproduction of the original image (see further **US-A-6 406 833**, cited already above, for positive and negative plates). However, a case for negative plates can easily be generated from a case for  
20 positive plates by means of a simple transformation, e.g. by transforming all pixel values  $x$  to  $255 - x$  (if the possible pixel values are 0 to 255).

The invention includes a method as disclosed above and as claimed in the appending claims. The invention also includes a  
25 printing plate and a printing plate precursor made by a method in accordance with the invention. Such a printing plate or printing plate precursor has non-ink-accepting areas corresponding to the non-printing dots generated by a method in accordance with the invention.

30

Those skilled in the art will appreciate that numerous modifications and variations may be made to the embodiments disclosed above without departing from the scope of the present invention.

- 10 -

## List of reference signs

- 10 : bitmap
- 11 : set of contiguous microdots
- 5 12 : set of contiguous microdots
- 20 : morphological filter
- 21 : location
- 22 : location
- 23 : location
- 10 25 : border
- 31 : microdot
- 32 : microdot
- 33 : microdot
- 34 : microdot
- 15 40 : non-printing dot

- 11 -

**[CLAIMS]**

1. A method for generating a bitmap (10) from an original image for printing a reproduction of said original image, wherein said  
5 bitmap (10) includes data selected from the group of screened data and non-screened data, the method comprising the steps of:
  - generating a set (11, 12) of contiguous microdots (31-34) of said bitmap (10), wherein said set of contiguous microdots is selected from the group of a set of contiguous microdots  
10 forming an image dot being part of said screened data and a set of contiguous microdots forming an entity of contiguous microdots being part of said non-screened data;
  - generating a non-printing dot (40) in said set (11, 12) of contiguous microdots (31-34), depending on a specific  
15 characteristic selected from a characteristic of said original image and a characteristic of said set of contiguous microdots.
2. The method according to claim 1 further comprising the steps of:
  - determining a possible location (32) in said set (11, 12) of  
20 contiguous microdots (31-34) for said non-printing dot (40);
  - checking if said possible location (32) fulfills a condition, wherein said condition depends on said specific characteristic;
  - generating said non-printing dot (40) only if said condition is fulfilled.
- 25 3. The method according to claim 1 or claim 2 wherein said specific characteristic is said characteristic of said original image.
4. The method according to claim 1 or claim 2 wherein said specific  
30 characteristic is said characteristic of said set of contiguous microdots.
5. The method according to claim 4 wherein said specific  
35 characteristic is a dot size of said image dot and wherein the method further comprises the step of:

- 12 -

- generating said non-printing dot (40) in said image dot only if said dot size of said image dot is larger than a predetermined minimum size.
- 5 6. The method according to any one of the preceding claims further comprising the step of:
- determining said set (11, 12) of contiguous microdots (31-34) by a raster image processor having a frame buffer.
- 10 7. The method according to any one of the preceding claims further comprising the step of:
- applying a morphological filter (20) to said set (11, 12) of contiguous microdots (31-34) for preserving fine details in said reproduction of said original image.
- 15 8. The method according to claim 7 when dependent on claim 6 further comprising the step of:
- applying said morphological filter (20) to said set (11, 12) of contiguous microdots (31-34) in said frame buffer.
- 20 9. The method according to any one of the preceding claims further comprising the step of:
- applying a second morphological filter (20) to said bitmap (10) for preserving fine details in said reproduction of said original image.
- 25 10. The method according to any one of the preceding claims further comprising the step of:
- exposing a printing plate precursor in accordance with said bitmap (10).
- 30 11. The method according to claim 10 wherein said exposure is a direct-to-plate exposure.

- 13 -

12. A method for printing a reproduction of an original image, the method comprising the steps of:
- generating a set (11, 12) of contiguous microdots (31-34) of a bitmap (10) of said original image;
  - 5 -generating a non-printing dot (40) in said set (11, 12) of contiguous microdots (31-34);
- characterized in that the method further comprises the step of:
- simultaneously exposing by a direct-to-plate exposure of both said set (11, 12) of contiguous microdots (31-34) and said non-
  - 10 -printing dot (40) a printing plate precursor according to said bitmap (10) of said original image.
13. The method according to claim 12 wherein said bitmap (10) is a screened representation (10) of said original image, the method
- 15 further including the steps of:
- generating an image dot of said screened representation (10);
  - generating said non-printing dot (40) in said image dot;
  - simultaneously exposing by said direct-to-plate exposure of both said image dot and said non-printing dot (40) said
  - 20 printing plate precursor according to said screened representation (10) of said original image.
14. A printing plate obtained by the method according to any one of claims 10 to 13.
- 25 15. A data processing system comprising means for carrying out the steps of the method according to any one of claims 1 to 9.
16. A computer program comprising computer program code means adapted
- 30 to perform the method according to any one of claims 1 to 9 when said program is run on a computer.
17. A computer readable medium comprising program code adapted to carry out the method according to any one of claims 1 to 9 when

- 14 -

run on a computer.

1/1

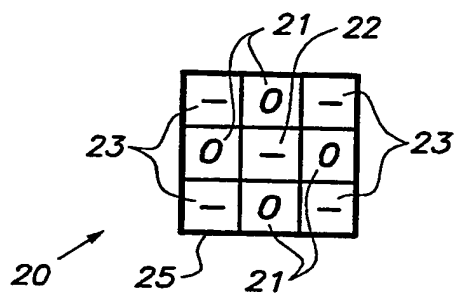


FIG. 1

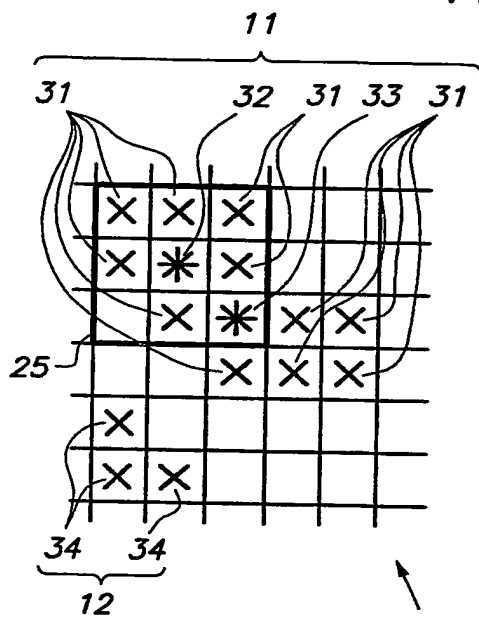


FIG. 2

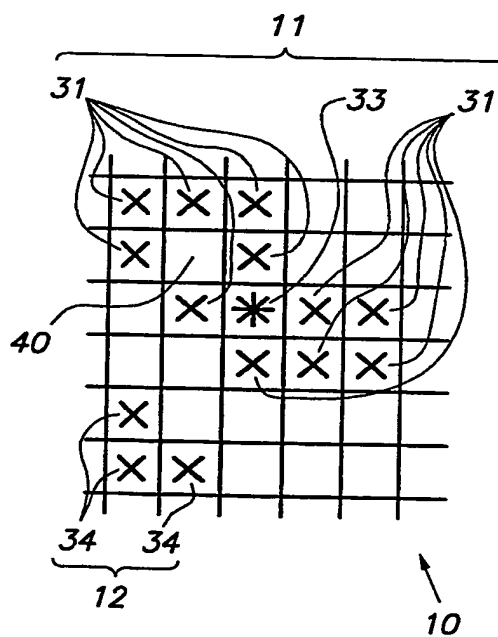


FIG. 3



## INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/50893

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04N1/40 G03F5/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04N G03F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 1 051 024 A (HEWLETT PACKARD CO) 8 November 2000 (2000-11-08) abstract; claims 1,2,4; figure 6	1-17
Y	EP 0 709 012 B (AGFA GEVAERT NV) 19 November 1997 (1997-11-19) page 6, line 51 - page 7, line 19; claim 1; figures 3,6 page 7, lines 38-47	1-17
Y	EP 0 740 457 A (AGFA GEVAERT NV) 30 October 1996 (1996-10-30) cited in the application page 2, lines 10-13; claims 1,7,18-21; figures 6,7	1-17
	----- -/--	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*G\* document member of the same patent family

Date of the actual completion of the international search

8 April 2004

Date of mailing of the international search report

19/04/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Thiele, N

## INTERNATIONAL SEARCH REPORT

International Application No.

PCT/EP 03/50893

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 877 865 A (FUKUTA SHIGENORI) 2 March 1999 (1999-03-02) abstract; claims 1-3 -----	1-17
A	DE 530 447 C (JULIUS BEKK DR; ULLSTEIN AKT GES) 29 July 1931 (1931-07-29) page 2, lines 105-121 -----	1-17
A	US 6 191 919 B1 (CATES JAMES C ET AL) 20 February 2001 (2001-02-20) claims 1,28 -----	1-17
A	EP 0 859 507 A (SEIKO EPSON CORP) 19 August 1998 (1998-08-19) claims 11-31 -----	1-17
A	FR 2 746 519 A (NOUEL JEAN MARIE) 26 September 1997 (1997-09-26) the whole document -----	1-17

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/50893

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1051024	A	08-11-2000	US 6563957 B1 EP 1051024 A2 JP 2000333010 A	13-05-2003 08-11-2000 30-11-2000
EP 0709012	B	01-05-1996	BE 1007264 A4 EP 0709012 A1 AT 171330 T DE 69406929 D1 DE 69406929 T2 DE 69413330 D1 DE 69413330 T2 WO 9502938 A1 EP 0634862 A1 JP 3479560 B2 JP 7057104 A JP 8512444 T US 5654808 A US 5828815 A	02-05-1995 01-05-1996 15-10-1998 02-01-1998 18-06-1998 22-10-1998 12-05-1999 26-01-1995 18-01-1995 15-12-2003 03-03-1995 24-12-1996 05-08-1997 27-10-1998
EP 0740457	A	30-10-1996	EP 0740457 A1 DE 69510918 D1 DE 69510918 T2 EP 0910206 A1 JP 2736048 B2 JP 8305005 A JP 10145593 A US 5766807 A	30-10-1996 26-08-1999 30-03-2000 21-04-1999 02-04-1998 22-11-1996 29-05-1998 16-06-1998
US 5877865	A	02-03-1999	JP 7117284 A	09-05-1995
DE 530447	C	29-07-1931	NONE	
US 6191919	B1	20-02-2001	EP 1070316 A2 WO 0041170 A2	24-01-2001 13-07-2000
EP 0859507	A	19-08-1998	US 6097502 A EP 0859507 A2 JP 10278348 A US 6185008 B1	01-08-2000 19-08-1998 20-10-1998 06-02-2001
FR 2746519	A	26-09-1997	FR 2746519 A1 BR 9708124 A EP 0888577 A1 WO 9735233 A1 JP 2000506997 T	26-09-1997 27-07-1999 07-01-1999 25-09-1997 06-06-2000

**THIS PAGE BLANK (USPTO)**

**THIS PAGE BLANK (USPTO)**